

### RSView®32 Integration


#### Overview

SeQent's RSView32 gateways monitor the specified alarms which match the defined conditions. Depending on the gateway, selected the actions may include:


- ⇒ Sending messages to wireless messaging destinations such as Cisco Instant Connect/ IPICS clients, Motorola MOTOTRBO digital two-way radios and mobile units, E-mail, pagers, smartphones and audible outputs.
- ⇒Raising alarms in our alarming engine for dispatch and escalation to wireless devices.
- ⇒ Sending messages to LED marquees, LCD/Plasma industrial digital signage or Andon displays as well as sounder devices.

SeQent's RSView32 gateways support all versions of RSView32 7.50 or higher.

### RSView®32 Integration General Overview

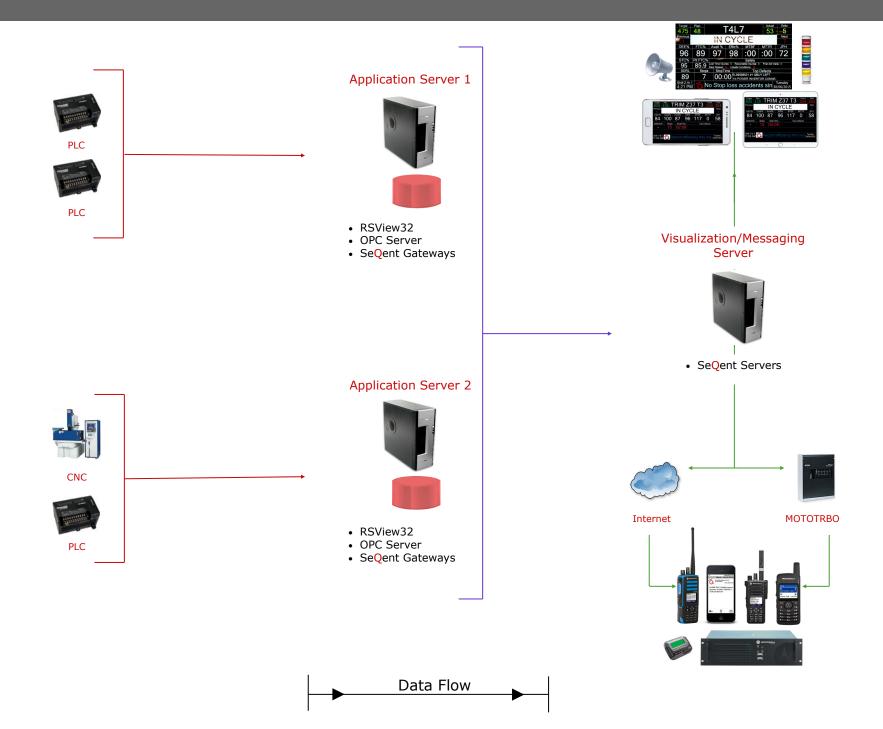

## RSView®32 Integration Application Server Overview

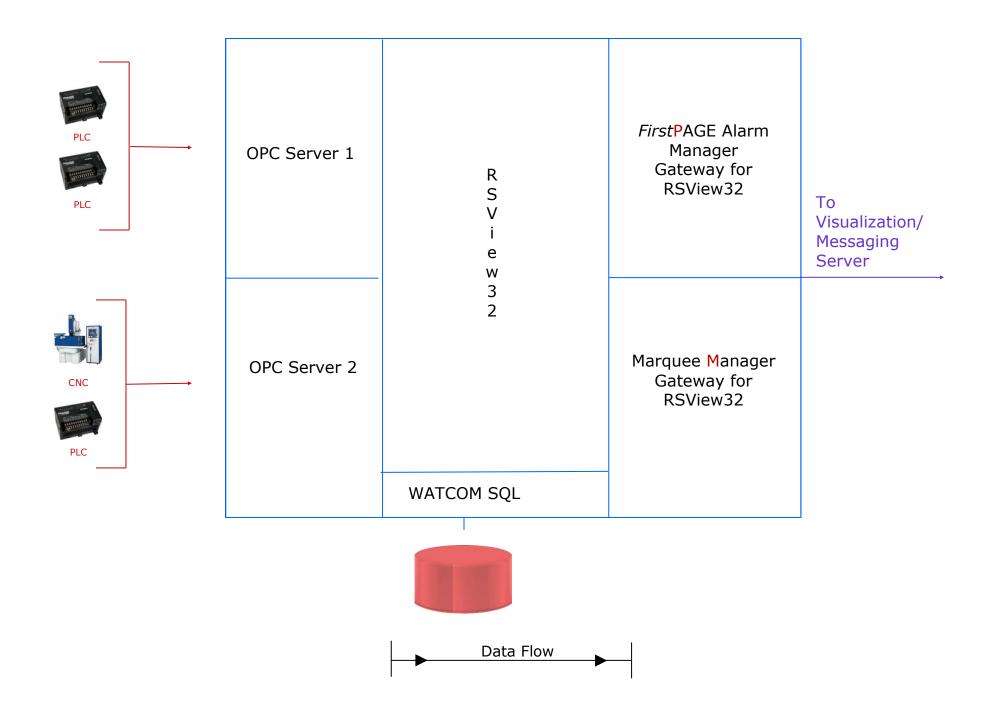

# RSView®32 Integration Visualization/Messaging Server

